



Bioinert Columns YMC-Accura Triart

Oligonucleotides
Peptides/proteins
Metal coordinating
compounds





Highly accurate results

Exceptional peak shapes

Excellent recoveries

No carry-over

Bioinert columns for bioseparations and coordinating compounds




Bioinert coated YMC-Accura Triart

Features

- Exceptional peak shapes with high sensitivities
- Excellent recoveries without column preconditioning
- Superior reproducibility and no carry-over effects
- Ideal for highly sensitive LC/MS analyses
- New surface coated hardware

Ideal choice for

- Oligonucleotides, nucleotides
- Peptides and proteins
- Metal coordinating compounds

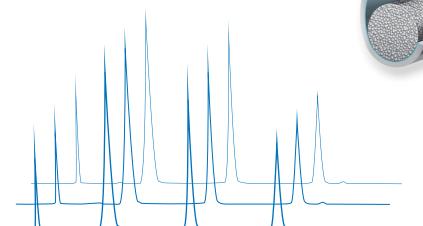

Reliable results without preconditioning!


Specifications


YMC-Triart Phases	C18, C18 ExRS, Bio C18, C8, Bio C4, Phenyl, PFP, Diol-HILIC
Particle Size	1.9, 3, 5 μm
Hardware	Bioinert coated stainless steel (all wetted parts incl. frits)
Pressure Limit	1.9 μm: 100 MPa / 1,000 bar / 15,000 psi 3/5 μm: 45 MPa / 450 bar / 6,525 psi
Column Connection	No special connections required

YMC-Accura Triart columns are an alternative to the already existing YMC-Triart metal-free, PEEK-lined columns from YMC. As the used column coating is less hydrophobic compared to the PEEK-lining, YMC-Accura columns are the ideal choice for e.g. more hydrophobic peptides which tend to show pronounced interactions with PEEK.

Available inert stationary phases



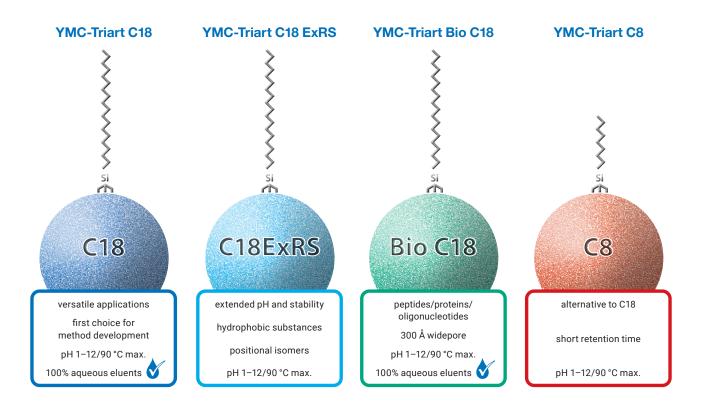


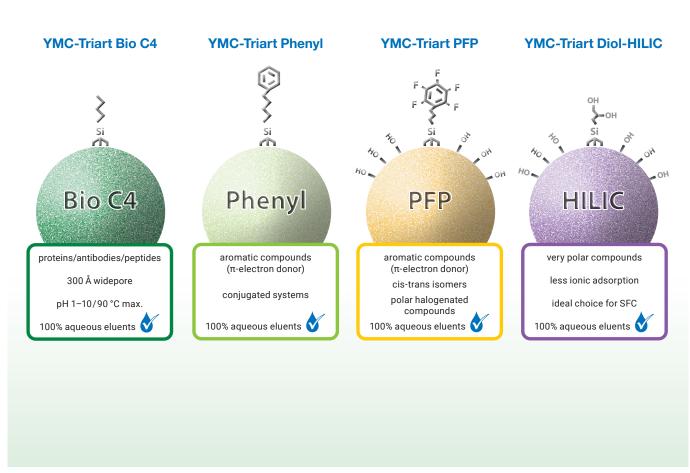

Ensured sensitivity and recovery




Ideal choice for challenging analytes such as phosphorothioate oligonucleotides

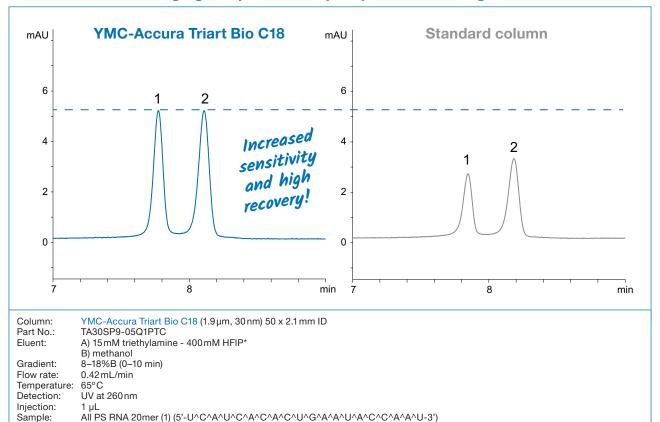

^{*1,1,1,3,3,3-}hexafluoro-2-propanol

High sensitivity and recovery

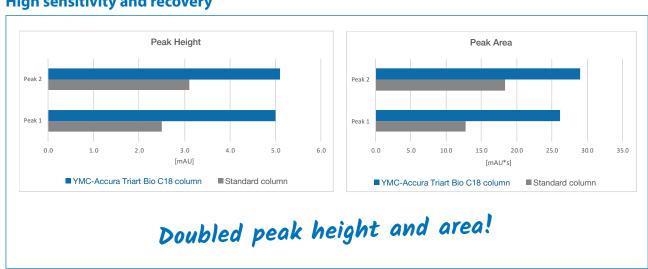


All PS RNA 21mer (2) (5'-G^U^C^A^U^C^A^C^U^G^A^A^U^A^C^C^A^A^U-3')

The YMC-Accura Triart Bio C18 column provides double peak heights and peak areas for the oligonucleotides compared to those for regular stainless-steel columns. YMC-Accura Triart columns enhance the sensitivity significantly and help to save precious samples without any loss.

Immediate reliability



No preconditioning required for reliable results from the 1st injection

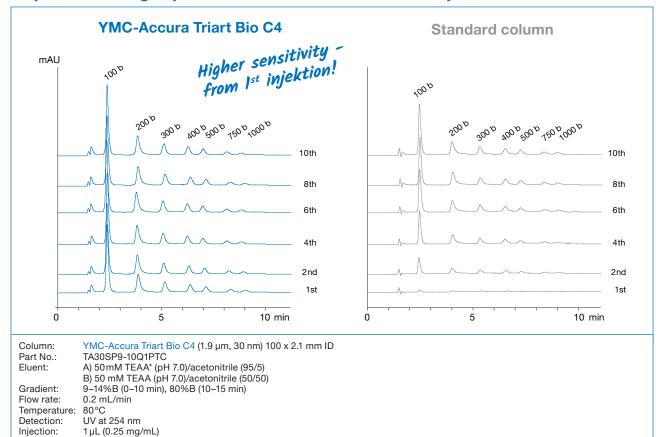


^{*} Triethylammonium acetate

Sample:

Constantly higher peak areas and therefore recoveries

100–1,000 bases (CenturyTM-Plus RNA Markers)

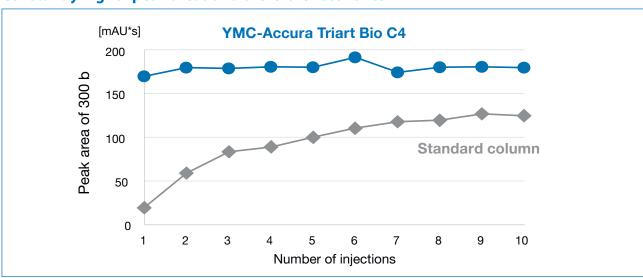

The YMC-Accura Triart Bio C4 column shows stable peak areas from the first injection, while the standard stainless-steel column provides only 10% of the peak area (for the 300 base marker) with the first injection. Even after the tenth injection, the peak areas of the stainless-steel column are considerably less than those of the YMC-Accura Triart column.

Robust coating for high inertness




Durable bioinert coating




The robust bioinert coating used on YMC-Accura hardware is 130 to 320-fold thicker making it more durable than other similar hardware concepts. A long-term inertness against sensitive substances is ensured.

In order to demonstrate its robustness, a YMC-Accura column was packed multiple times. Even though this is quite a challenge for the column surface, the coating remains unaffected (SEM* picture: top area is bare steel for comparison).

Other coated columns can lose their inertness over time. This will again lead to adsorption of sensitive compounds on the uncovered metallic surfaces. Peak tailing, loss of recovery and sample carryover are typical results of the delamination of the coating. After only unpacking a coated competitor column most of the coating is already delaminated (dark spots: remaining coating).



High surface inertness without any adsorption

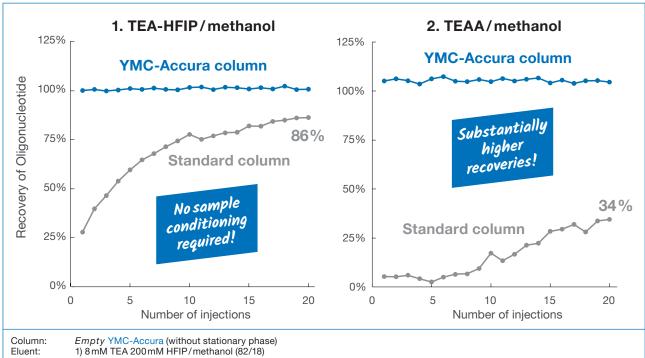

2) 100 mM TEAA/methanol (82/18)

0.42 mL/min Flow rate: Detection: UV at 260 nm 65°C Injection:

1 μL All PS RNA 20mer (1) (5'-U^C^A^U^C^A^C^A^C^U^G^A^A^U^A^C^C^A^A^U-3') Sample:

^=Phosphorothioate

The YMC-Accura hardware with its inert surface area prevents adsorption of oligonucleotides using a range of different buffers. No sample conditioning is required.


YMC-Accura columns further provide significantly higher recoveries and sensitivities that cannot be achieved with regular stainless steel columns - even after conditioning with 20 sample injections. These ready-to-use columns ensure high recovery and reproducibility from the very first use.

^{*}Scanning Electron Microscope


Application examples



siRNA duplex under denaturing conditions

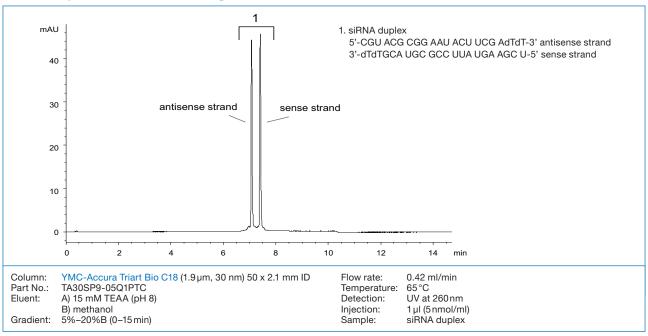

siRNA duplex and its single strands under non-denaturing conditions

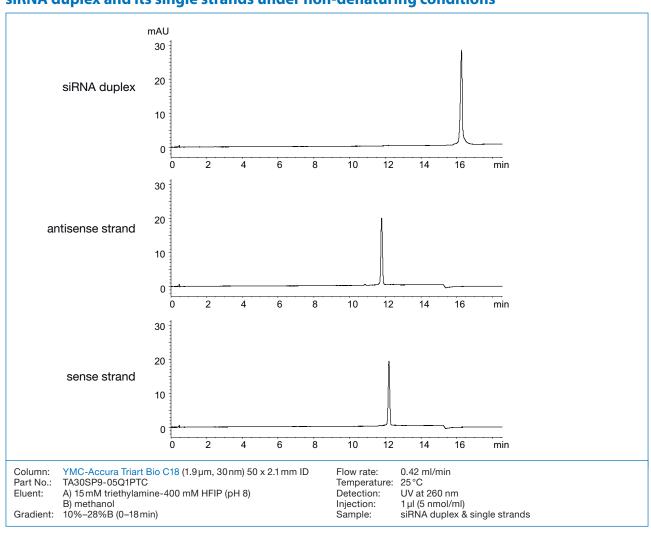

Ordering information



YMC-Accura Triart 1.9 µm UHPLC columns (max. pressure 1,000 bar)

Phase	Column ID (mm)	Column length (mm)		
		50	100	150
C18	2.1	TA12SP9-05Q1PTC	TA12SP9-10Q1PTC	TA12SP9-15Q1PTC
C18 ExRS	2.1	TAR08SP9-05Q1PTC	TAR08SP9-10Q1PTC	TAR08SP9-15Q1PTC
Bio C18	2.1	TA30SP9-05Q1PTC	TA30SP9-10Q1PTC	TA30SP9-15Q1PTC
C8	2.1	TO12SP9-05Q1PTC	TO12SP9-10Q1PTC	TO12SP9-15Q1PTC
Bio C4	2.1	TB30SP9-05Q1PTC	TB30SP9-10Q1PTC	TB30SP9-15Q1PTC
Phenyl	2.1	TPH12SP9-05Q1PTC	TPH12SP9-10Q1PTC	TPH12SP9-15Q1PTC
PFP	2.1	TPF12SP9-05Q1PTC	TPF12SP9-10Q1PTC	TPF12SP9-15Q1PTC
Diol-HILIC	2.1	TDH12SP9-05Q1PTC	TDH12SP9-10Q1PTC	TDH12SP9-15Q1PTC

YMC-Accura Triart 3 µm HPLC columns (max. pressure 450 bar)

Phase	Column ID (mm)	Column length (mm)		
		50	100	150
C18	2.1	TA12S03-05Q1PTC	TA12S03-10Q1PTC	TA12S03-15Q1PTC
	4.6	TA12S03-0546PTC	TA12S03-1046PTC	TA12S03-1546PTC
C18 ExRS	2.1	TAR08S03-05Q1PTC	TAR08S03-10Q1PTC	TAR08S03-15Q1PTC
	4.6	TAR08S03-0546PTC	TAR08S03-1046PTC	TAR08S03-1546PTC
Bio C18	2.1	TA30S03-05Q1PTC	TA30S03-10Q1PTC	TA30S03-15Q1PTC
	4.6	TA30S03-0546PTC	TA30S03-1046PTC	TA30S03-1546PTC
C8	2.1	TO12S03-05Q1PTC	TO12S03-10Q1PTC	TO12S03-15Q1PTC
	4.6	TO12S03-0546PTC	TO12S03-1046PTC	TO12S03-1546PTC
Bio C4	2.1	TB30S03-05Q1PTC	TB30S03-10Q1PTC	TB30S03-15Q1PTC
	4.6	TB30S03-0546PTC	TB30S03-1046PTC	TB30S03-1546PTC
Phenyl	2.1	TPH12S03-05Q1PTC	TPH12S03-10Q1PTC	TPH12S03-15Q1PTC
	4.6	TPH12S03-0546PTC	TPH12S03-1046PTC	TPH12S03-1546PTC
PFP	2.1	TPF12S03-05Q1PTC	TPF12S03-10Q1PTC	TPF12S03-15Q1PTC
	4.6	TPF12S03-0546PTC	TPF12S03-1046PTC	TPF12S03-1546PTC
Diol-HILIC	2.1	TDH12S03-05Q1PTC	TDH12S03-10Q1PTC	TDH12S03-15Q1PTC
	4.6	TDH12S03-0546PTC	TDH12S03-1046PTC	TDH12S03-1546PTC

YMC-Accura Triart 5 µm HPLC columns (max. pressure 450 bar)

Phase	Column ID (mm)	Column length (mm)		
		50	100	150
C18	2.1	TA12S05-05Q1PTC	TA12S05-10Q1PTC	TA12S05-15Q1PTC
	4.6	TA12S05-0546PTC	TA12S05-1046PTC	TA12S05-1546PTC
C18 ExRS	2.1	TAR08S05-05Q1PTC	TAR08S05-10Q1PTC	TAR08S05-15Q1PTC
	4.6	TAR08S05-0546PTC	TAR08S05-1046PTC	TAR08S05-1546PTC
Bio C18	2.1	TA30S05-05Q1PTC	TA30S05-10Q1PTC	TA30S05-15Q1PTC
	4.6	TA30S05-0546PTC	TA30S05-1046PTC	TA30S05-1546PTC
C 8	2.1	TO12S05-05Q1PTC	TO12S05-10Q1PTC	TO12S05-15Q1PTC
	4.6	TO12S05-0546PTC	TO12S05-1046PTC	TO12S05-1546PTC
Bio C4	2.1	TB30S05-05Q1PTC	TB30S05-10Q1PTC	TB30S05-15Q1PTC
	4.6	TB30S05-0546PTC	TB30S05-1046PTC	TB30S05-1546PTC
Phenyl	2.1	TPH12S05-05Q1PTC	TPH12S05-10Q1PTC	TPH12S05-15Q1PTC
	4.6	TPH12S05-0546PTC	TPH12S05-1046PTC	TPH12S05-1546PTC
PFP	2.1	TPF12S05-05Q1PTC	TPF12S05-10Q1PTC	TPF12S05-15Q1PTC
	4.6	TPF12S05-0546PTC	TPF12S05-1046PTC	TPF12S05-1546PTC
Diol-HILIC	2.1	TDH12S05-05Q1PTC	TDH12S05-10Q1PTC	TDH12S05-15Q1PTC
	4.6	TDH12S05-0546PTC	TDH12S05-1046PTC	TDH12S05-1546PTC

YMC Europe GmbH

Schöttmannshof 19 D-46539 Dinslaken Germany Phone +49 2064 427-0, FAX +49 2064 427-222 www.ymc.eu

Région Sud-Est: h.breton@chromoptic.comRégion Ile-de-France Centre: Céline LAURENCE claurence@chromoptic.com Région Nord et Est: vfillebeen@chromoptic.com Région Grand Ouest: mlebon@chromoptic.com

Contactez-nous pour plus d'informations:

Hervé BRETON

06.75.55.98.45 07.85.27.58.57

Valérie FILLEBEEN 06.76.68.29.65 **Marjolaine LEBON** 06.36.77.11.25

